

**ASMUSS**  
**ACTUATORS**

MODELS: PW TO P50  
PWS TO P50S

POA

**PRISMA PNEUMATIC ACTUATORS:**

- Double acting and
- Spring return

**BODY MATERIALS:**


- Aluminium
- Polyamide
- Stainless steel



POA

**PRISMA ACTUATOR ACCESSORIES:**


- Limit switches
- Proximity switches
- Positioners
- Position transmitters
- Solenoids
- Manual override
- Mounting kits

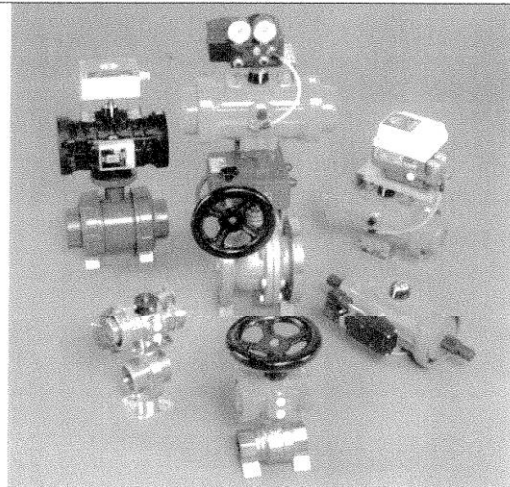

LT

**LIMITORQUE ELECTRIC ACTUATORS: MX SERIES**

- Torques up to 2307 Nm
- Multiturn + quarter turn
- Manual override
- On/Off or modulating
- Limit + torque switches
- All voltages
- Rising + non-rising spindle
- LCD display



NA

**NOAH ELECTRIC ACTUATORS:**

- Torques 60 to 2500 Nm
- Quarter turn
- Manual override
- On/Off or modulating
- Limit + torque switches
- All voltages



## ACTUATED VALVES


Swiftomatic Ball Valves c/w Pneumatic Actuators			
Valve Size	Valve Code	Double Acting Code	Price for Valve & D/Acting Actuator
15	BVSW/015	BADA/015-025	
20	BVSW/020	BADA/015-025	
25	BVSW/025	BADA/015-025	
32	BVSW/032	BADA/032-050	
40	BVSW/040	BADA/032-050	
50	BVSW/050	BADA/032-050	
65	BVSW/065	BADA/065-080	
80	BVSW/080	BADA/065-080	
Valve Size	Valve Code	Spring Close Code	Price for Valve & Spring Close Actuator
15	BVSW/015	BASR/015-025	
20	BVSW/020	BASR/015-025	
25	BVSW/025	BASR/015-025	
32	BVSW/032	BASR/032-040	
40	BVSW/040	BASR/032-040	
50	BVSW/050	BASR/050	

**ENDS:**  
BSP F/F.

**BODY & TRIM:**  
Nickel plated brass body, full bore chrome plated brass ball PTFE seats.

**RATING:**  
CWP – 16 bar size 15mm-32mm;  
10 bar size 40mm-80mm at ambient temperature.  
Actuator selections based on 5 Bar air supply and valves on liquid service.

*Swiftomatic Valves and Actuators*



**80mm to 1500mm**

Code: NJL1


**ENDS:**  
Wafer and lugged.

**BODY & TRIM:**  
C/S, S/S, titanium and alloy 20, metal seats, c/w pneumatic actuators and positioners.

**RATING:**  
ANSI Class 150 to 600, CV's from 270 to 87,000.

**APPLICATIONS:**  
For control of liquids, gases, steam, liquors, stock, etc.

*Neles Eccentric Disc Control Valves*



**25mm to 400mm**

Code: NJR1

**ENDS:**  
Wafer and flanged.

**BODY & TRIM:**  
C/S, S/S, titanium, etc. Metal and PTFE seats, c/s pneumatic actuators and positioners.

**RATING:**  
ANSI Class 150 to 300, CV's from 0.5 to 5,270.

**APPLICATIONS:**  
For precise control of gases, liquids, stream, slurries, stock, etc.

*Neles Segment Type Control Valve*

