


a supplier and a substantial of <b>C</b> A	TE VALVES	
15mm   20mm     MALE ENDS   EXISTING     15mm   20mm     MALE/FEMALE ENDS   STOCK ONLY	ENDS: Screwed BSP. BODY & TRIM: Brass, integral seats. RATING: 200 psi CWP. APPLICATIONS: General plumbing, water distribution and light industrial duty.	A-Gate Brass Gate Valve
15mm     20mm     25mm     32mm       10 PCS BOX     10 PCS BOX     5 PCS BOX     5 PCS BOX       40mm     50mm     65mm     80mm       4 PCS BOX     2 PCS BOX     2 PCS BOX     1 PCS BOX       1 PCS BOX     2 PCS BOX     2 PCS BOX     1 PCS BOX       1 PCS BOX     2 PCS BOX     2 PCS BOX     1 PCS BOX       Code: AGVFF	ENDS: Screwed BSP. BODY & TRIM: Brass, integral seats. RATING: 200 psi CWP. APPLICATIONS: General plumbing, water distribution and light industrial duty.	A-Gate Brass Gate Valve
10mm     15mm     20mm     25mm       32mm     40mm     50mm        Code: LVG3	ENDS: Screwed BSP. BODY & TRIM: Bronze body, integral seats, all dezincification resistant. RATING: 14 bar CWP. Temperatures to 180°C. APPLICATIONS: A heavy pattern, corrosion resistant valve for industrial use. Hot and cold liquids, gases, and steam.	Liquetec LVG3 Gate Valve
15mm     20mm     25mm     32mm       40mm     50mm     65mm     80mm       Code: LVG30     0     0     0	ENDS: Flanged (Undrilled). Can be drilled to T/E & D, ANSI 125 & 150, PN 6 & 10. BODY & TRIM: LG2 bronze body, CZ121 non-dezinc stem. Marine specification to Lloyds Register. RATING: Cold Water or Oil up to 14 bar. Temp. to 175°C. APPLICATIONS: A heavy pattern, corrosion resistant valve for industrial use, marine service/saltwater.	Liquetec LVG30 Gate Valve





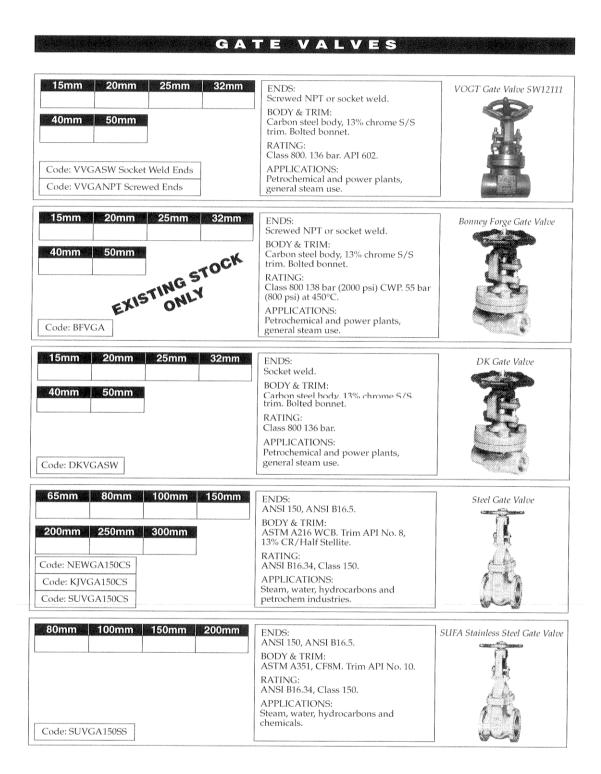

G A	TE VALVES	
50mm     65mm     80mm     100mm       125mm     150mm     200mm       250mm     300mm       Code: MVCIGE	ENDS: BS10 T/E drilled. BODY & TRIM: CI body, inside screw non-rising stem, with position indicator. RATING: 13.8 bar. APPLICATIONS: General industrial and mechanical services.	Maxiflo Cast Iron Gate Valve Non-Rising Stem
200mm 250mm 300mm	ENDS: BS10 T/E drilled. BODY & TRIM: CI body, bronze trim, outside screw and yoke. RATING: 13.8 bar. APPLICATIONS: General industrial and mechanical services.	Maxiflo Cast Iron Gate Valve Rising Stem OS & Y
100mm 150mm Code: SVGV	ENDS: Grooved. BODY & TRIM: ductle iron body with EPDM encapsulated gate. RATING: 14 bar CWP. APPLICATIONS: Epoxy coated body. UL/FM listed for fire protection service.	SHURJOINT 722G 0S+Y Gate Valve
50mm     65mm     80mm     100mm       150mm     200mm     250mm     300mm       Code: SVFH	ENDS: Flanged to AS4087 Fig. B-5 (bolting same as AS2129 T/D). BODY & TRIM: Body and bonnet ductile iron fusion bonded epoxy coated. Wedge rubber coated. Clockwise closing with handwheel. Manufactured to AS2638.2-2002. Certified to AS4020 for use on drinking water. Standards Mark Licence SMKP 20171. RATING: Valve rated to 16 bar.	SUFA Resilient Seat Gate Valve



GA	TE VALVES	an and the state of the state
15mm 20mm 25mm 32mm   40mm 50mm   Code: HSGAVSS	ENDS: Screwed BSP. BODY & TRIM: ASTM CF8M 316 S/S body, bonnet spindle wedge and seats. RATING: 200 psi – 14 bar CWP. APPLICATIONS: Corrosive fluids/gases. Food, drug, chemical process.	HSY Fig. GT-200 5/S Gate Value
50mm     80mm     100mm     150mm       200mm     250mm     300mm        Code: FAVC67S	ENDS: To suit ANSI 150. BODY & TRIM: 316 S/S body and gate, S/S upstand and bolts/nuts, EPDM resilient perimeter seal. RATING: 10 bar CWP. APPLICATIONS: Pulp stock, slurries, sewage, etc.	FABRI C67S Knife Gate Valve S/S Body & Perimeter Seal
80mm     100mm     125mm     150mm       200mm     250mm     300mm	ENDS: To suit ANSI 150, tapped metric To suit BS10 T/E, tapped metric BODY & TRIM: 316 S/S body and gate EDPM seat APPLICATIONS: Pulp stock, slurries, sewage, etc.	CMO Type A Knife Gate Valve
80mm     100mm     150mm     200mm       250mm     300mm	Pnuematic Actuator, double acting to suit CMO Type A Knife Gate Valve	CMO Actuator
15mm     25mm     32mm     40mm       20 PCS BOX     20 PCS BOX     10 PCS BOX     10 PCS BOX       65mm     100mm     10 PCS BOX     10 PCS BOX       1 PCS BOX     1 PCS BOX     10 PCS BOX     10 PCS BOX	ENDS: Screwed BSP. BODY & TRIM: Brass, integral seats, pressed metal handwheel. RATING: 10 bar CWP. APPLICATIONS: Irrigation.	ITAP 155 Brass Gate Valve